


Heavy duty HD bracket camera; 150°; WDR; IR leds; Mic; Heater (NTSC)

Art. Nr: CAM-HD-Q5HD

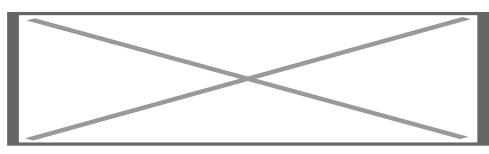

DESCRIPTION

Heavy duty HD camera; Front/Rear/Side; 1280x960 (NTSC)

Features

- 1/3.2" SONY CMOS HD Color Sensor
- Vibration & impact resistant housing
- All view direction applicable (via rotary key)
- IP69K Waterproof rating
- 150 degrees lens (Wide field of view)
- WDR (Wide Dynamic Range)
- High End Night View (0.0Lux) with 8* LEDs
- Built-in microphone located on the back to minimize the wind noise
- Easy switching NORMAL or MIRROR View
- Voltage range (12V-32V)
- Extreme Temp. Durability
 - Operating: -30°C ~ 60°C
 - Storing Temp. : -40°C ~ 80°C
- 4-pins Mini connector to RCA
- Front/Rear/Side mounting
- CE-mark
- FCC-mark
- 2 Year warranty & Support

EXCLUSIVE CAMERA FEATURES

High End 1/3.2" SONY CMOS HD Color Sensor with 1280*960 resolution

SONY

Heater

The camera is equipped with heater function.

-Auto heater ON/OFF at 0 degrees

-Warming inside of the camera for working normal



IR leds

The camera is equipped with 8* IR nightvision leds.

-Auto ON/OFF by a brightness detecting sensor


-Progreesive Brightness adjustment

-Wider & Longer illuminating range by a patented designed front glass




Mirror & Unmirror option

The camera is equipped with the magnet for the mirror image view as a factory default. So, remove the magnet for the Normal Image View.

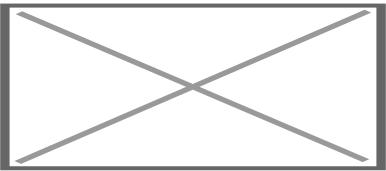


Easy fix

Easy installation via the included bracket




Sunviser

Included adjustabel sunvisor



Metal screw lock

Water- & shock proof 4-pins mini din screw lock connector.

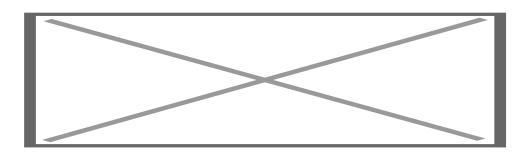

Ignition proof (+15)

It is possible to connect the powersupply to an ignition feed (+15), because we use the highest quality camera.

In this way you are able to watch the camera also in DRIVE gear or via manual selection.


NOTES

- We recommend that the installation will be performed by a qualified specialist

- Check also the other tabs for "Compatibility" - "Package contents" - "Product specifications"

LEGAL NOTICE

Please check before purchase if it is aloud to install this camera and it wont affect your MOT.

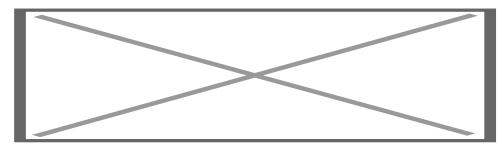

COMPATIBILITY

Universal use Only for rear installation

NOTES

- RCA output = male
- CVBS signal is NTSC